

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number  
WO 03/089519 A1

(51) International Patent Classification<sup>7</sup>: C08L 81/06, C08K 5/51, 5/00, G02B 1/04, C08J 5/18

(21) International Application Number: PCT/US03/11501

(22) International Filing Date: 15 April 2003 (15.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/372,078 15 April 2002 (15.04.2002) US  
60/452,961 10 March 2003 (10.03.2003) US

(71) Applicant (for all designated States except US): SOLVAY  
ADVANCED POLYMERS, LLC [US/US]; 4500 McGinnis  
Ferry Road, Alpharetta, GA 30005 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): EL-HIBRI, M., Ja-  
mal [LB/US]; 6851 Roswell Road, No. M-18, Atlanta, GA  
30328 (US).

(74) Agents: CODD, Bernard, P. et al.; McDermott, Will &  
Emery, 600 13th Street, N.W., Washington, DC 20005-  
3096 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: POLYSULFONE COMPOSITIONS EXHIBITING VERY LOW COLOR AND HIGH LIGHT TRANSMITTANCE  
PROPERTIES AND ARTICLES MADE THEREFROM

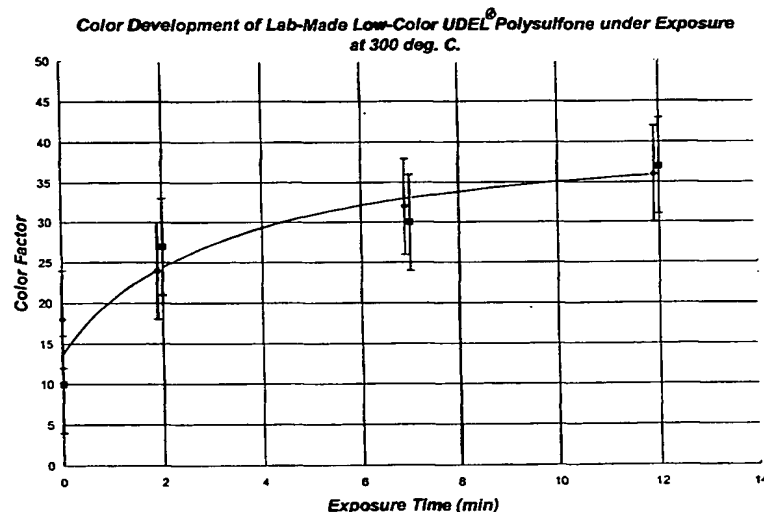

(57) Abstract: A polysulfone composition is provided having a total luminous light transmittance of 84 % or greater when measured on 0.1 inch thick specimens using ASTM D-1003. The specimens also meet at least one of the following two conditions: 1) a yellowness index (YI) of less than about 5.0 as measured according to ASTM D-1925 on 0.1 inch thick specimens, or 2) a color factor (CF) of less than about 25, wherein CF is defined by the following equation:  $CF = 270[(x+y)_{\text{sample}} - (x+y)_{\text{std}}]/t$ , wherein x and y are chromaticity coordinates measured in transmittance mode and t is sample thickness in inches. Another polysulfone composition is provided comprising a polysulfone, an organic phosphorous-containing melt stabilizer, and at least one of the following additives: a blue to violet dye, and an organic optical brightener. The polysulfone composition of the present invention is used to form transparent molded articles such as ophthalmic lenses.